DISH PRO PLUS 44 SWITCH

D — Up to 48 Tuners *

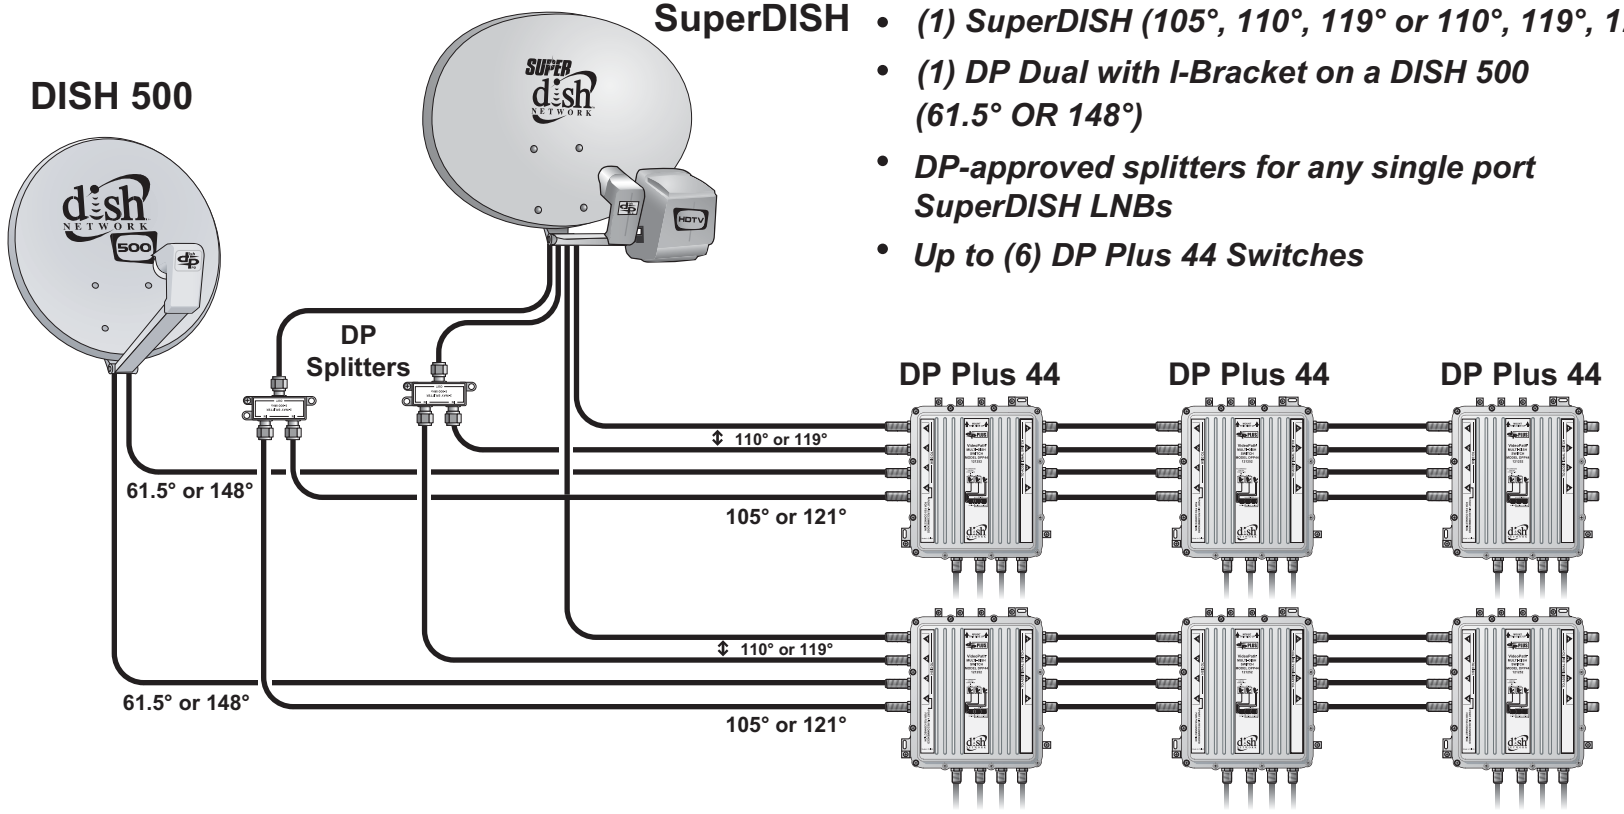

- *(1) SuperDISH (105°, 110°, 119° or 110°, 119°, 121°)*
- *(1) DP Dual with I-Bracket on a DISH 500 (61.5° OR 148°)*
- *DP-approved splitters for any single port SuperDISH LNBs*
- *Up to (6) DP Plus 44 Switches*

Each DP Plus 44 Switch requires a Power Inserter on port 1

- *DP34s can be trunked onto DP Plus 44s: receivers connected to DP34s will only see up to three orbital locations, and legacy receivers connected to DP34s will require DP Adapters.*
- *When Legacy receivers are installed, refer to the DISH Pro Plus 44 Switch Installation Guide for proper LNBF-to-Switch connectivity.*
- *Refer to TIB "Receivers that Support the DP Plus 44 Switch" for the latest receiver software support information.*
- *Grounding according to the National Electric Code (NEC) and all local electrical codes is required.*

* *Each DISH Pro Plus receiver connected to a DP Plus 44 must use a DP Plus Separator placed as close as possible to the receiver for the single-cable, DISH Pro Plus receiver (dual tuner) installation advantage.*

Rev 7/6/04